


Remove rear side trim (lower section),  
refer to 51 43 015

Lift off cover (1). Unfasten connector (2) and withdraw cable.

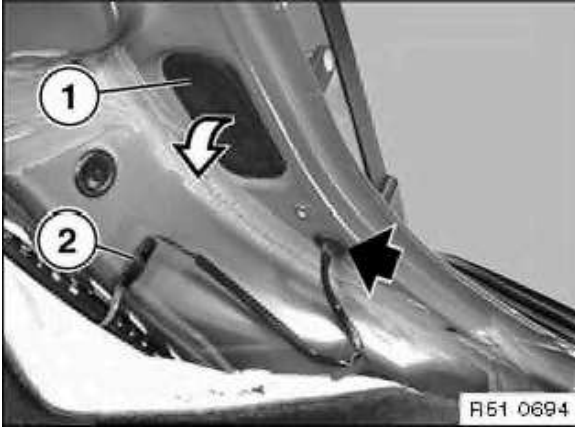

Unfasten screws (1) then remove threaded plate (2) and striker  
(3)

**Installation:**

Adjust striker.

