


Removing and installing rear upper section of side trim
panel,

refer to 51 43 010

Removing and installing rocker panel cover strip (inside),

refer to 51 47 000

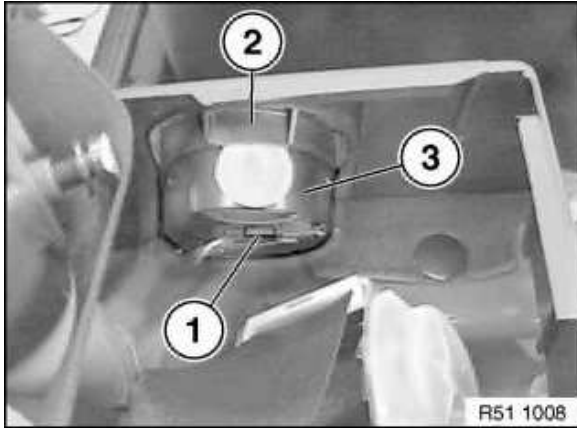


Version with Hifi system:

Unfasten plug connection (1).

Only replace:

Unfasten screw connection (2) and take off loudspeaker (3).

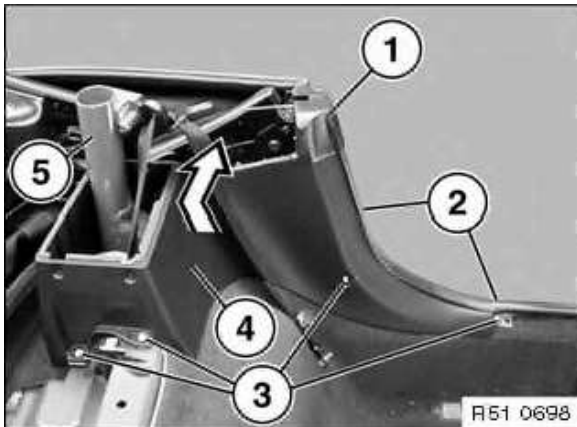

Note:

The convertible top lid must be closed to remove the side
trim panel (4).

Partially unfasten cover (1) and edge protector (2). Unfasten
screws (3) and pull lower section of side trim (4)
upward/forward over the belt anchor (5).