



Release screws (2) on left and right in cowl panel (1).

Note:


Keep screws (2) in cowl panel (1).

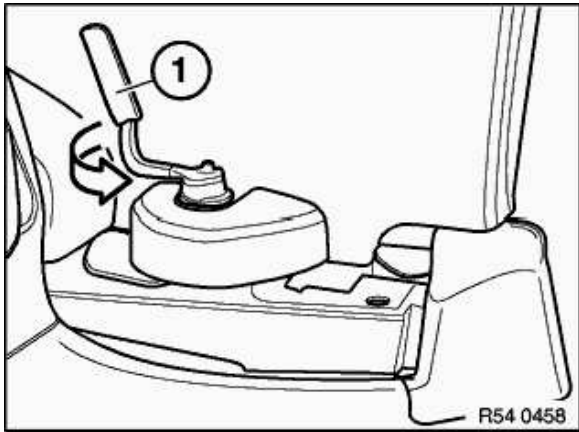

Turn locking lever (1) on left and right forwards.

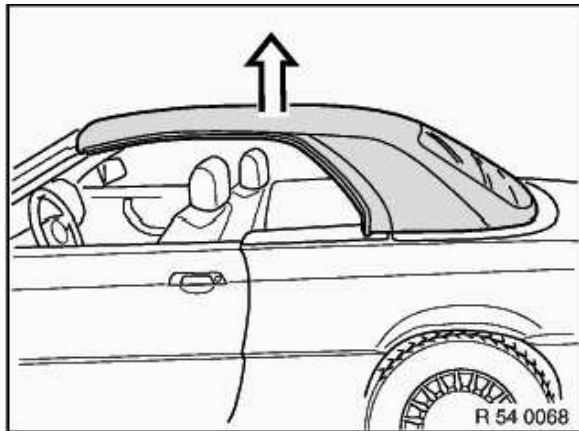

Lift off hard top with a second person.

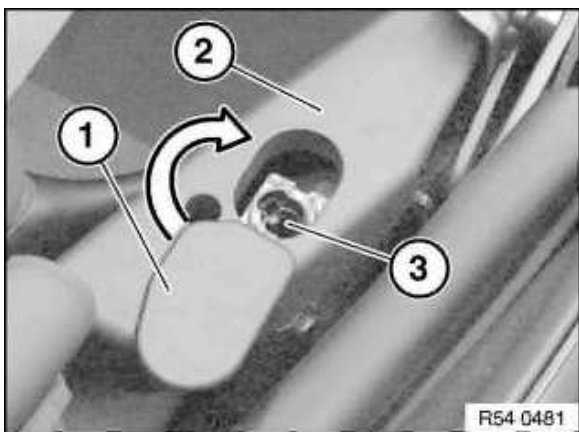

Close off hard top locating point (3) with cap (1) on cover at top of B-pillar (2).