


Open trunk lid.  
Unclip cover.

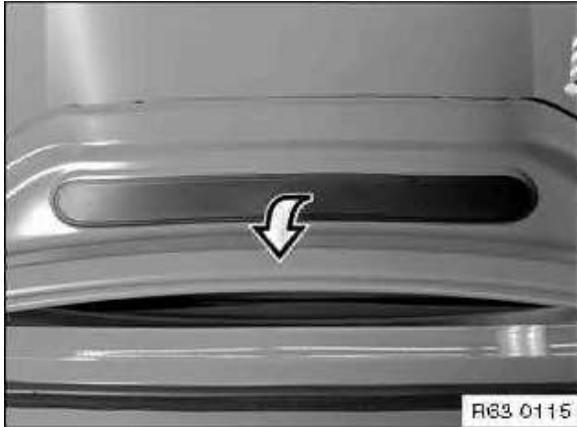

Twist the defective lamp socket and remove.  
Light bulb out of socket

**Caution!**

Do not take hold of glass part of bulb with bare fingers.  
Only take hold of bulb on base or with a clean cloth or  
packaging of light bulb.

Note type of bulb,

